

AHT
a member of **DAIKIN** group

FIXWELL
www.fixwell.co.nz



PARIS

_Refrigerators and freezers. Plug-in installation

The reliable benchmark champion that has changed the retail trade.

PARIS is the world's most reliable refrigeration unit! On the market for more than 20 years, continuously optimised and the longest service life – these are the key features of our ready-to-connect PARIS refrigerator and freezer unit.



LOW COSTS

The low investment outlay and operating costs speak for themselves. In addition, the outer-skin condenser on PARIS provides for completely maintenance-free refrigeration. Ready-to-connect installation means PARIS can be used immediately. It can also be easily combined with overhanging KINLEY XL or KINLEY X5 units.



VISUAL MERCHANDISING

With its deeply curved lid, PARIS offers excellent visibility of the goods on display. Thanks to the height- and width-adjustable product racks and the LED interior lighting, products can be presented perfectly. PARIS has a smooth-running push-pull lid which ensures easy removal of merchandise.



HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. The electronically controlled, variable-speed compressor (VS) reduces power consumption by 25%. In addition, the new energy-saving fan saves 0.5 kWh every day.



ENVIRONMENT AND CLIMATE

PARIS units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured. The plastic interior drip tray guarantees easy cleaning.



COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling	+3°C to +15°C ¹
Freezing	-18°C to -23°C
Mincemeat/meat chilling	0°C to +2°C

¹ Fixed preset that can be changed by a service technician

USPs

MOST RELIABLE REFRIGERATION UNIT

PARIS is an enduring bestseller – with more than 200,000 units sold and lowest service rates, PARIS is the most reliable refrigeration unit on the market.

OPTIMISED SIZE AND VISIBILITY

Thanks to its low depth, PARIS is particularly suitable for convenience stores and smaller spaces. The panoramic sliding glass covers provide a particularly good view of the produce.





STANDALONE UNIT



IN-LINE UNIT



BLOCK INSTALLATION

CONFIGURATIONS

Solo



Row




Block



Island




- _ optionally with end cabinet on both sides
- _ extendible with commercially available shelf attachments

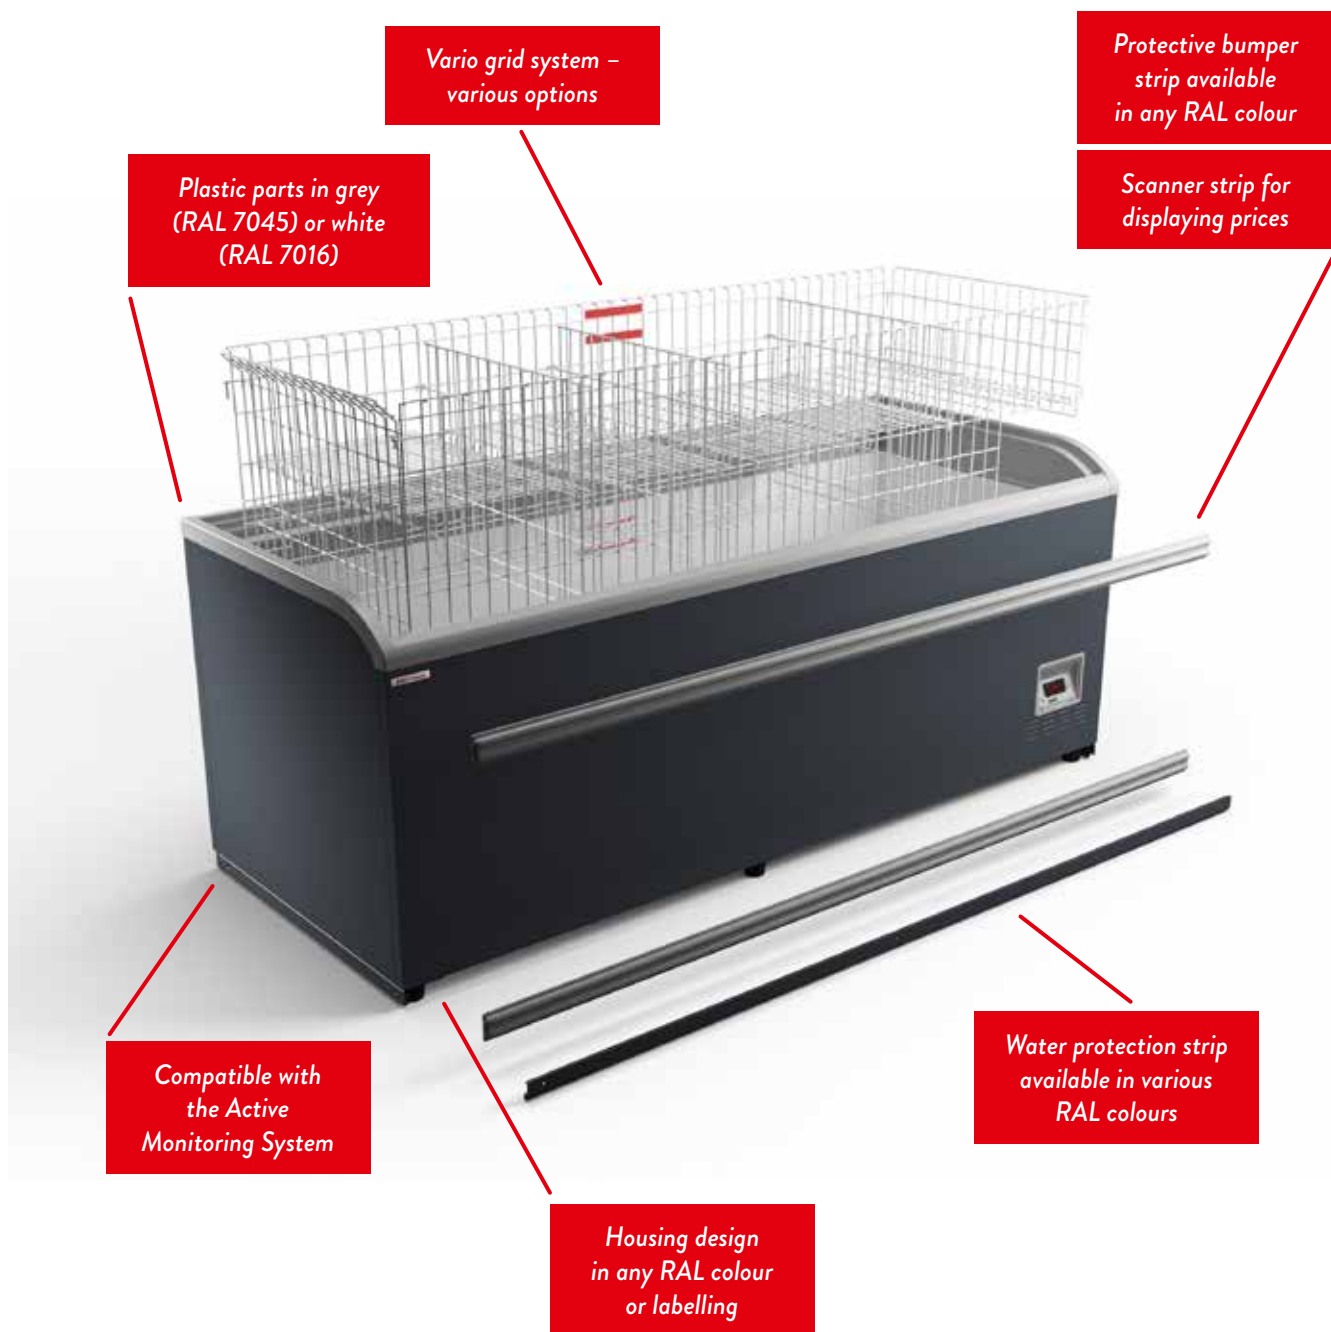


ACCESSORIES

- _ Scanner strips
- _ Impact protection
- _ Price display for end cabinet (suitable for high cover)
- _ High cover (between the back-to-back units)
- _ Low cover (between the back-to-back units)
- _ Side cover (closes off the island at the sides)
- _ Water protection strip (colour change on customer request)
- _ Vario grid system (rack inserts & wire dividers) & wire basket inserts
- _ Colour and styling options tailored to customer requirements (housing, protective bumper strip, plastic parts in 2 standard colours)
- _ Compatible with the Active Monitoring System (AMS)

PARIS EC 185

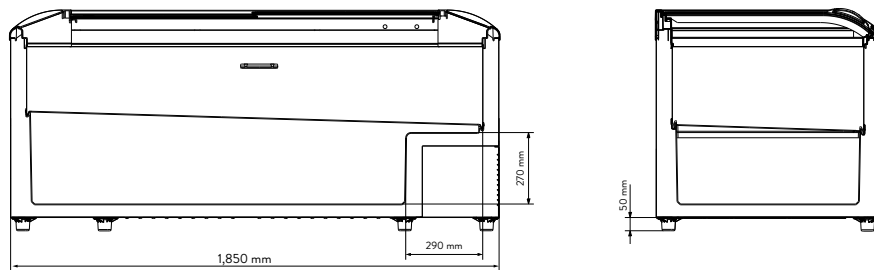

PARIS 145 / 210 / 250

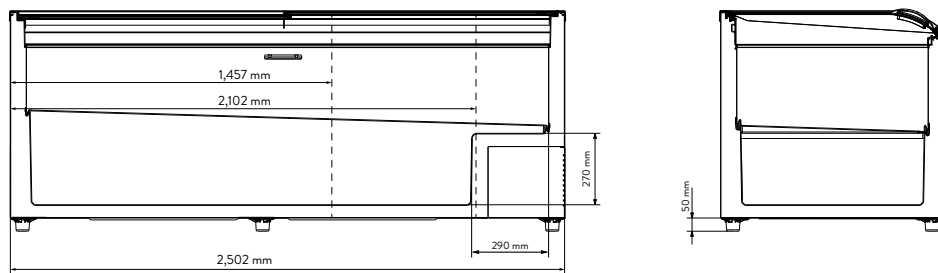

DIMENSIONS

PARIS		145	EC 185	210	250
Length, exterior / interior	mm	1,457 / 1,328	1,854 / 1,723	2,102 / 1,973	2,502 / 2,373
Depth, exterior / interior	mm	853 / 723	853 / 723	853 / 723	853 / 723
Height, front / rear	mm	770 / 833	770 / 833	770 / 833	770 / 833
Stacking height, front / rear	mm	550 / 550	550 / 550	550 / 550	550 / 550